


## cage strander with backtwist

Stock number:	1144-10880
Type of machinery:	cage strander with backtwist
Manufacturer:	NIEHAUS
Type:	
Year:	1979
Control unit:	conventional
Maker of control unit:	
Country of origin:	Germany
Item location:	
Delivery time:	short term
Freight basis:	Ex foundation-location, unpacked

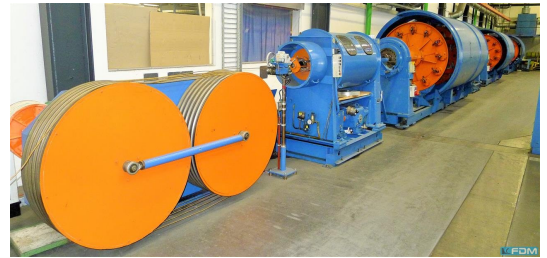

### Seller

**bongard** BONGARD MACHINES GMBH & CO. KG  
 machines ■■■ Ohlweg 7  
 58730 Fröndenberg

Phone: +49 (2378) 915-5

Fax: +49 (2378) 915-300

E-Mail: [info@bongard.de](mailto:info@bongard.de)

[www.bongard.de](http://www.bongard.de)

### techn. Details

spools per cage:	1 + 6 + 12 + 18
spool flange Ø max:	400 mm
cable Ø max:	35 mm
cable Ø min:	3 mm
lay length min:	32 mm
lay length max:	900 mm
up to now used for:	insulated cores
single wire Ø min:	0,5 mm
single wire Ø max:	4 mm
type of drive:	
motor power:	kW
revolutions:	min-1
total connected load:	kW
operation voltage:	400 V
frequency:	50 Hz
control voltage:	V
suitable for:	Specialcable, Telecom, Energiecable, control cable
spool core Ø max:	mm
useful spool width max:	mm
total spool width max:	200 mm
spool bore Ø max:	mm
spool capacity max:	60 kg
examples of production:	
cage revolutions:	170 min-1
speed:	m/min
speed max:	m/min
conductor Ø min:	mm
conductor Ø max:	mm
direction of production:	

## cage strander with backtwist

protection devices:

machine length:	35000 mm
machine width:	mm
machine height:	mm
machine weight:	kg

### Description

min-Ø stranded (Nippel): 3,0 mm.  
max-Ø stranded (Nippel): 41,5 mm.

Line consist of:

1 x pay off

3 x cages

2 x taping heads

1 x pay off capstan

1 x take up

taping width min.: 10 mm

taping width max.: 50 mm